

EXAMINED BY :  <i>Tony Chen</i>	EMERGING DISPLAY  TECHNOLOGIES CORPORATION	FILE NO . CAS-10108
APPROVED BY:  <i>David Chang</i>		ISSUE : OCT.20 ,1999
		TOTAL PAGE : 9
		VERSION : 3

CUSTOMER                      ACCEPTANCE                      SPECIFICATIONS

MODEL NO. :

13B30 (EL TYPES)

FOR MESSRS :

\_\_\_\_\_

CUSTOMER'S APPROVAL

DATE :

\_\_\_\_\_

BY :

\_\_\_\_\_



Polarizer Mode	Backlight	Code value
Transflective	—	E
Transmissive	—	F

Backlight Color	Code Value
White	W
Blue-Green	B

E W 13 B 30 G E W

LCD type + LCD color	Code Value
STN + Yellow-Green	Y
STN + Gray	G
FSTN + White	F

TABLE OF CONTENTS

NO.	ITEM	PAGE
1.	GENERAL SPECIFICATIONS -----	1
2.	MECHANICAL SPECIFICATIONS -----	1
3.	ABSOLUTE MAXIMUM RATINGS -----	2
4.	ELECTRICAL CHARACTERISTICS -----	3
5.	INTERFACE TIMING CHARACTERISTICS -----	4
6.	OPTICAL CHARACTERISTICS -----	5
7.	OUTLINE DIMENSION -----	6
8.	BLOCK DIAGRAM -----	7
9.	DETAIL DRAWING OF DOT MATRIX -----	8
10.	INTERFACE SIGNALS -----	8
11.	POWER SUPPLY -----	9

1. GENERAL SPECIFICATIONS

1.1 GENERAL SPECIFICATIONS

PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :

EU - 002 A

1.2 APPLICATION NOTES FOR CONTROLLER

PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :

EU - 100

1.3 THIS INDIVIDUAL SPECIFICATION IS PRIOR TO GENERAL SPECIFICATIONS .

2. MECHANICAL SPECIFICATIONS

- (1) NUMBER OF DOTS ----- 128W \* 64H DOTS
- (2) MODULE SIZE ----- 93.0W \* 70.0H \* 9.5D(max) mm
- (3) EFFECTIVE AREA ----- 70.7W \* 38.8H mm
- (4) ACTIVE AREA ----- 65.25W \* 32.61H mm
- (5) DOT SIZE ----- 0.48W \* 0.48H mm
- (6) DOT PITCH ----- 0.51W \* 0.51H mm
- (7) LCD TYPE \*
- (8) DRIVING METHOD ----- 1 / 64 DUTY MULTIPLEX DRIVE
- (9) BACKLIGHT \*

\* PLEASE REFER TO NUMBERING SYSTEM .

### 3. ABSOLUTE MAXIMUM RATINGS

#### 3.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS .

PARAMETER		SYMBOL	MIN .	MAX .	UNIT	REMARK
POWER SUPPLY FOR LOGIC		VDD - VSS	0	7.0	V	
INPUT VOLTAGE		VI	VSS	VDD	V	
STATIC ELECTRICITY		—	—	100	V	NOTE (1)
POWER SUPPLY FOR EL BACKLIGHT	VOLTAGE	VEL	—	AC200	Vrms	fEL = 1.0 KHZ 60 SEC . MAX
	FREQUENCY	fEL	—	2.0	KHZ	AC115 Vrms 60 SEC . MAX

NOTE (1) : TEST METHOD AND CONDITIONS :  
AFTER CHARGING UP 200 PF CAPACITOR BY STATED VOLTAGE ,  
THE CAPACITOR IS CONNECTED WITH INTERFACE PINS OF THE  
MODULE .

#### 3.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS .

I T E M	OPERATING		STORAGE		REMARK
	MIN .	MAX .	MIN .	MAX .	
AMBIENT TEMPERATURE	-20 °C	60 °C	-30 °C	70 °C	NOTE (2) , (3)
HUMIDITY	—	85 % RH	—	85 % RH	WITHOUT CONDENSATION
VIBRATION	—	2.45 m/s <sup>2</sup> (0.25 G)	—	11.76 m/s <sup>2</sup> (1.2 G)	10~100 HZ XYZ DIRECTIONS 1 Hr . EACH
SHOCK	—	29.4 m/s <sup>2</sup> (3 G)	—	490.0 m/s <sup>2</sup> (50 G)	10 mSECONDS XYZ DIRECTIONS 1 TIME EACH
CORROSIVE GAS	NOT ACCEPTABLE		NOT ACCEPTABLE		

NOTE (2) : Ta AT -30°C : 48HR MAX .  
70°C : 48HR MAX .

NOTE (3) : BACKGROUND COLOR CHANGES SLIGHTLY DEPENDING ON AMBIENT  
TEMPERATURE THIS PHENOMENON IS REVERSIBLE .

4. ELECTRICAL CHARACTERISTICS

Ta = 25 °C

VDD = 5.0 V

PARAMETER	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT
POWER SUPPLY VOLTAGE FOR LOGIC	VDD – VSS	—	4.75	5.0	5.25	V
INPUT VOLTAGE NOTE (1)	VIH	H LEVEL	0.7*VDD	—	VDD	V
	VIL	L LEVEL	GND	—	0.3*VDD	V
OUTPUT VOLTAGE NOTE (1)	VOH	H LEVEL	VDD-0.4	—	—	V
	VOL	L LEVEL	—	—	0.4	V
POWER SUPPLY CURRENT FOR LOGIC NOTE (2)	IDD	VDD–VSS = 5.0 V VDD–VO = 9.2 V	—	7.0	—	mA
RECOMMENDED LCD DRIVING VOLTAGE NOTE (3)	VDD – V0 ∅ = 10° θ = 0°	Ta = -20 °C	—	9.2	—	V
		Ta = 25 °C	—	9.2	—	
		Ta = 60 °C	—	8.7	—	
POWER SUPPLY FOR EL BACKLIGHT	VEL	fEL=400HZ	—	100	—	Vrms
	IEL	VEL=100V fEL=400HZ	—	3.5	—	mArms

NOTE (1): APPLIED TO TERMINALS CS1, CS2, R/W, D/I, DB0~DB7, E, RST.

NOTE (2): THE DISPLAY PATTERN IS ALL “ON”. / “OFF”.

NOTE (3): RECOMMENDED LCD DRIVING VOLTAGE MAY FLUCTUATE ABOUT ±1.0V BY EACH MODULE.

5. INTERFACE TIMING CHARACTERISTICS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	FIG.
E cycle time	t <sub>CYC</sub>	1000	—	—	nS	1,2
E high level	P <sub>WEH</sub>	450	—	—	nS	1,2
E low level width	P <sub>WEL</sub>	450	—	—	nS	1,2
E rise time	t <sub>r</sub>	—	—	25	nS	1,2
E fall time	t <sub>f</sub>	—	—	25	nS	1,2
Address setup time	t <sub>AS</sub>	140	—	—	nS	1,2
Address hold time	t <sub>AH</sub>	10	—	—	nS	1,2
Data setup time	t <sub>DSW</sub>	200	—	—	nS	1
Data delay time	t <sub>DDR</sub>	—	—	320	nS	2
Data hold time (Write)	t <sub>DHW</sub>	10	—	—	nS	1
Data hold time (Read)	t <sub>DHR</sub>	20	—	—	nS	2

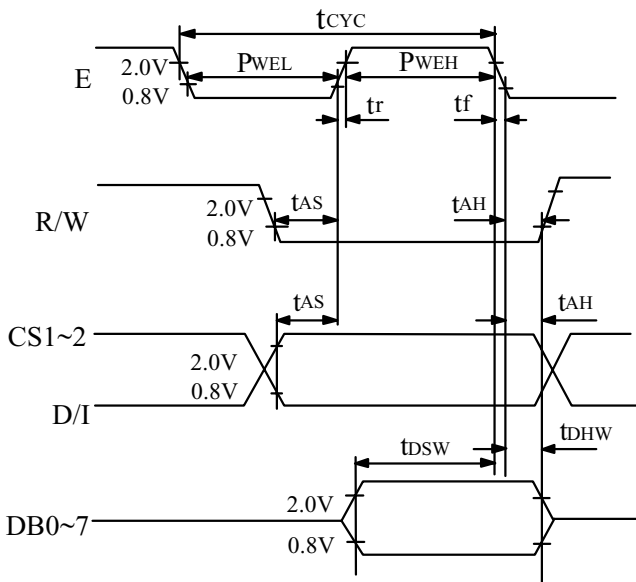


Fig . 1 CPU Write Timing

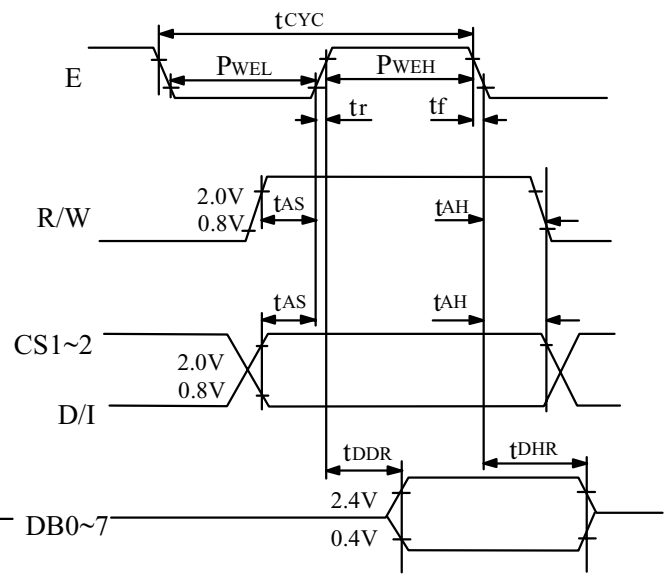


Fig . 1 CPU Read Timing




6. OPTICAL CHARACTERISTICS

I T E M		SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
VIEWING AREA	STN	$\varnothing 2 - \varnothing 1$	$K \geq 1.4$	30	—	—	deg.	1
	FSTN			40	—	—	deg.	1
CONTRAST RATIO	STN	K	$\varnothing = 10^\circ$ $\theta = 0^\circ$	—	5	—	—	1
	FSTN			—	8	—	—	1
RESPONSE TIME	tr ( rise )	$\varnothing = 10^\circ$ $\theta = 0^\circ$	Ta = -20°C	—	5538	—	ms	1
			Ta = 25°C	—	228	—		
			Ta = 60°C	—	104	—		
	tf ( fall )		Ta = -20°C	—	2316	—		
			Ta = 25°C	—	174	—		
			Ta = 60°C	—	85	—		
THE BRIGHTNESS OF BACKLIGHT	B	$\varnothing = 10^\circ$ $\theta = 0^\circ$	10	—	—	cd/m <sup>2</sup>	2	
			25	—	—		3	

NOTE (1) : PLEASE REFER TO :  
CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS.  
EU-002A


NOTE (2) : POLARIZER MODE : TRANSFLECTIVE  
NOTE (3) : POLARIZER MODE : TRANSMISSIVE

7. OUTLINE DIMENSION

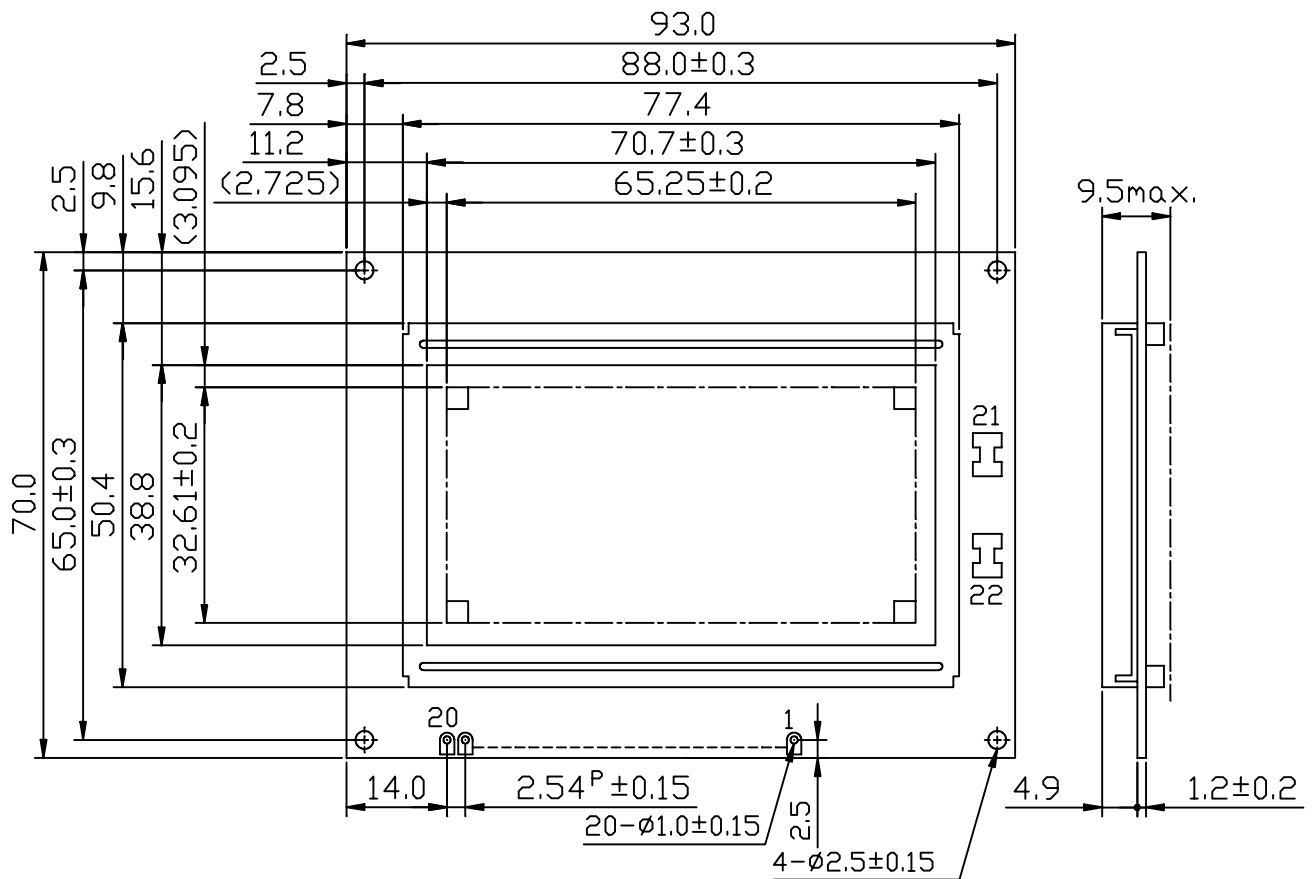


UNIT : mm  
SCALE : NTS  
NOT SPECIFIED TOLERANCE IS ±0.5mm

8. BLOCK DIAGRAM

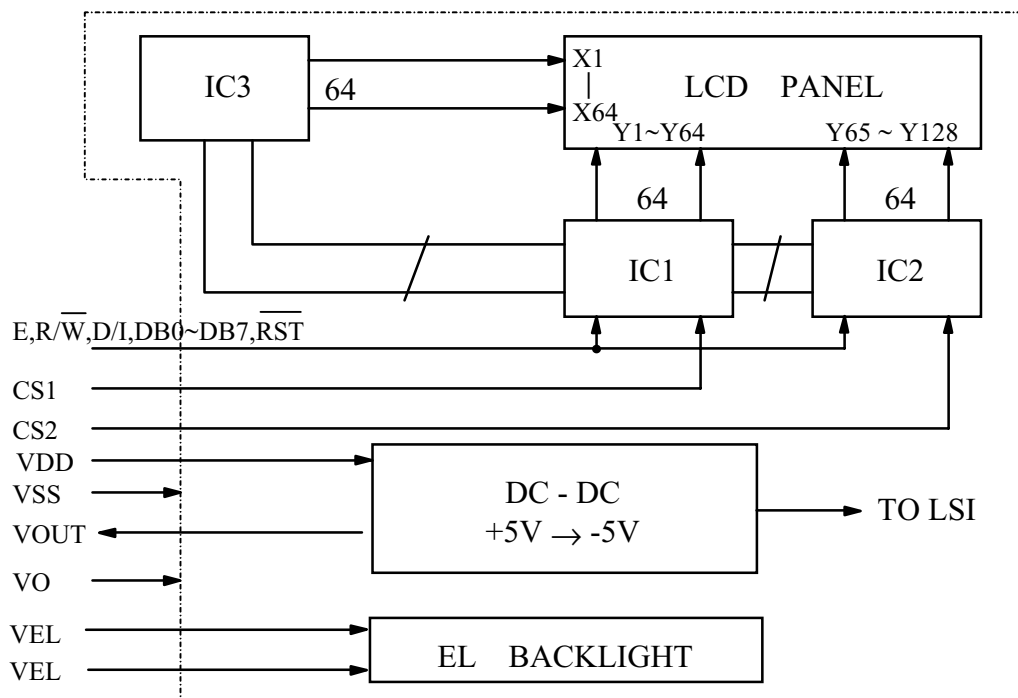

9. DETAIL DRAWING OF DOT MATRIX

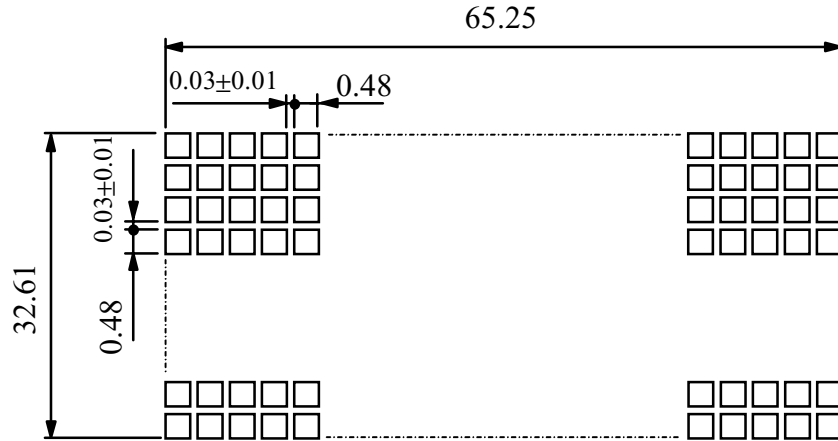


UNIT : mm  
SCALE : NTS  
NOT SPECIFIED TOLERANCE IS  $\pm 0.1$

10. INTERFACE SIGNALS

PIN NO	SYMBOL	LEVEL	FUNCTION
1	VSS	—	GROUND
2	VDD	—	POWER SUPPLY FOR LOGIC CIRCUIT
3	VO	—	OPERATING VOLTAGE FOR LCD DRIVING
4	D/I	H/L	H: DATA REGISTER L: INSTRUCTION REGISTER
5	$\overline{R/W}$	H/L	H: DATA READ (LCD MODULE $\rightarrow$ MPU) L : DATA WRITE (LCD MODULE $\leftarrow$ MPU)
6	E	H,H $\rightarrow$ L	ENABLE SIGNAL
7   14	DB0   DB7	H/L	DATA BUS LINE
15	CS1	H	CHIP SELECTION FOR IC1
16	CS2	H	CHIP SELECTION FOR IC2
17	RST	L	RESET
18	VOUT	—	POWER SUPPLY FOR LCD DRIVING
19	N.C.	—	————
20	N.C.	—	————
21	VEL	—	POWER SUPPLY FOR EL BACKLIGHT
22	VEL		


1 1 . POWER SUPPLY

1 1 . 1 POWER SUPPLY FOR LCM

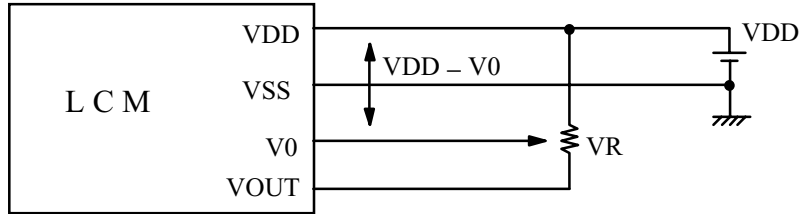

VDD-V0 : LCD DRIVING VOLTAGE  
VR : 10K ~ 20KΩ

1 1 . 2 POWER SUPPLY FOR EL BACK - LIGHT

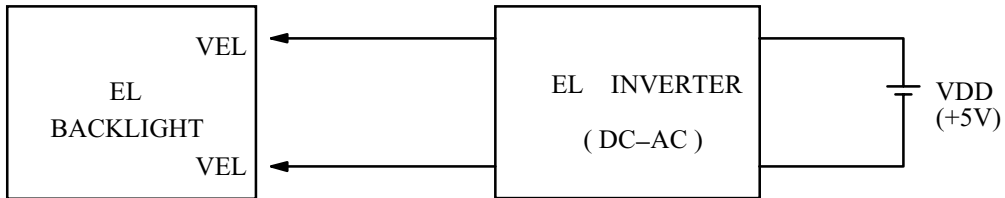

RECOMMENDED INVERTER : SOUN50350

1 1 . 3 TIMING OF POWER SUPPLY AND INTERFACE SIGNAL

