





Polarizer Mode	Backlight	Code value
Transflective	LED	L
Transmissive	LED	M

E W 2 4 D 0 0 G L Y

LCD type + LCD color	Code Value
STN + Yellow-Green	Y
STN + Gray	G
STN + Blue	B
FSTN + White	F
FSTN + Black	N

TABLE OF CONTENTS

NO.	ITEM	PAGE
1.	GENERAL SPECIFICATIONS -----	1
2.	MECHANICAL SPECIFICATIONS -----	1
3.	ABSOLUTE MAXIMUM RATINGS -----	2
4.	ELECTRICAL CHARACTERISTICS -----	3
5.	INTERFACE TIMING CHARACTERISTICS -----	4
6.	OPTICAL CHARACTERISTICS -----	5
7.	OUTLINE DIMENSION -----	6
8.	BLOCK DIAGRAM -----	7
9.	DETAIL DRAWING OF DOT MATRIX -----	8
10.	INTERFACE SIGNALS -----	8
11.	POWER SUPPLY -----	9

1. GENERAL SPECIFICATIONS

1.1 GENERAL SPECIFICATIONS

PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :

EU - 002 A

1.2 APPLICATION NOTES FOR CONTROLLER

PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :

EU - 110

1.3 THIS INDIVIDUAL SPECIFICATION IS PRIOR TO GENERAL SPECIFICATIONS .

2. MECHANICAL SPECIFICATIONS

- (1) NUMBER OF DOTS ----- 240W \* 128H DOTS
- (2) MODULE SIZE ----- 144.0W \* 104.0H \* 17.0D(max) mm
- (3) EFFECTIVE AREA ----- 114.0W \* 64.0H mm
- (4) ACTIVE AREA ----- 107.97W \* 57.57H mm
- (5) DOT SIZE ----- 0.42W \* 0.42H mm
- (6) DOT PITCH ----- 0.45W \* 0.45H mm
- (7) LCD TYPE \*
- (8) DRIVING METHOD ----- 1 / 128 DUTY MULTIPLEX DRIVE
- (9) BACKLIGHT ----- LED , COLOR:YELLOW-GREEN

\* PLEASE REFER TO NUMBERING SYSTEM .

### 3. ABSOLUTE MAXIMUM RATINGS

#### 3.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS .

PARAMETER	SYMBOL	MIN .	MAX .	UNIT	REMARK
POWER SUPPLY FOR LOGIC	VDD — VSS	0	6.5	V	
POWER SUPPLY FOR LCD DRIVING	VDD — VEE	0	22.0	V	
INPUT VOLTAGE	VI	VSS	VDD	V	
STATIC ELECTRICITY	—	—	100	V	NOTE (1)
LED POWER DISSIPATION	PD	—	10.3	W	
LED FORWARD CURRENT	IF	—	2250	mA	
LED REVERSE VOLTAGE	VR	—	8	V	

NOTE (1) : TEST METHOD AND CONDITIONS :  
AFTER CHARGING UP 200 PF CAPACITOR BY STATED VOLTAGE ,  
THE CAPACITOR IS CONNECTED WITH INTERFACE PINS OF THE  
MODULE .

#### 3.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS .

I T E M	OPERATING		STORAGE		REMARK
	MIN .	MAX .	MIN .	MAX .	
AMBIENT TEMPERATURE	-20 °C	70 °C	-30 °C	80 °C	NOTE (2) , (3)
HUMIDITY	—	85 % RH	—	85 % RH	WITHOUT CONDENSATION
VIBRATION	—	2.45 m/s <sup>2</sup> (0.25 G)	—	11.76 m/s <sup>2</sup> (1.2 G)	10~100 HZ XYZ DIRECTIONS 1 Hr . EACH
SHOCK	—	29.4 m/s <sup>2</sup> (3 G)	—	490.0 m/s <sup>2</sup> (50 G)	10 mSECONDS XYZ DIRECTIONS 1 TIME EACH
CORROSIVE GAS	NOT ACCEPTABLE		NOT ACCEPTABLE		

NOTE (2) : Ta AT -30°C : 48HR MAX .  
80°C : 168HR MAX .

NOTE (3) : BACKGROUND COLOR CHANGES SLIGHTLY DEPENDING ON AMBIENT  
TEMPERATURE THIS PHENOMENON IS REVERSIBLE .

#### 4. ELECTRICAL CHARACTERISTICS

Ta = 25 °C

VDD = 5.0 V

PARAMETER	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT
POWER SUPPLY VOLTAGE FOR LOGIC	VDD — VSS	—	4.75	5.0	5.25	V
POWER SUPPLY VOLTAGE FOR LCD DRIVE	VEE — VSS	—	-15.5	-16.0	-16.5	V
INPUT VOLTAGE NOTE (1)	VIH	H LEVEL	2.2	—	—	V
	VIL	L LEVEL	—	—	0.8	V
OUTPUT VOLTAGE NOTE (1)	VOH	H LEVEL	2.4	—	VCC	V
	VOL	L LEVEL	0	—	0.4	V
POWER SUPPLY CURRENT FOR LOGIC NOTE (2)	IDD	VDD — VSS = 5.0 V VDD — VO = 18.2V	—	6.0	—	mA
POWER SUPPLY CURRENT FOR LCD DRIVE NOTE (2)	IEE	VDD — VSS = 5.0 V VDD — VO = 18.2V	—	5.0	—	mA
RECOMMENDED LCD DRIVING VOLTAGE NOTE (3)	VDD-VO ∅ = 10° θ = 0°	Ta = -20 °C	—	18.2	—	V
		Ta = 25 °C	—	18.2	—	
		Ta = 70 °C	—	15.0	—	
CLOCK OSCILLATION FREQUENCY	f <sub>osc</sub>	—	—	2	—	MHZ
LED FORWARD VOLTAGE	VF	IF = 900 mA	—	4.2	4.6	V
LED FORWARD CURRENT	IF	—	—	900	—	mA
LED REVERSE CURRENT	IR	VR = 8V	—	—	200	μA

NOTE (1): APPLIED TO TERMINALS E,  $\overline{CS}$ ,  $\overline{R/W}$ , RS, DB0~DB7,  $\overline{RES}$ .


NOTE (2): THE DISPLAY PATTERN IS ALL "OFF" / "ON".

NOTE (3): RECOMMENDED LCD DRIVING VOLTAGE MAY FLUCTUATE ABOUT ±1.0V BY EACH MODULE.

5. INTERFACE TIMING CHARACTERISTICS

$V_{CC} = 5.0V, T_a = -20 \sim 70^\circ C$

ITEM	SYMBOL	MIN	TYP	MAX	UNIT
Enable cycle time	$t_{CYC}$	1.0	—	—	$\mu S$
Enable pulse width	H LEVEL	0.45	—	—	$\mu S$
	L LEVEL	0.45	—	—	$\mu S$
Enable rise time	$t_{Er}$	—	—	25	nS
Enable fall time	$t_{Ef}$	—	—	25	nS
Setup time	$t_{AS}$	140	—	—	nS
Data setup time	$t_{DSW}$	225	—	—	nS
Data delay time	$t_{DDR}$	—	—	225	nS
Data hold time	$t_{DHW}$	10	—	—	nS
Address hold time	$t_{AH}$	10	—	—	nS
Data hold time	$t_{DH}$	20	—	—	nS

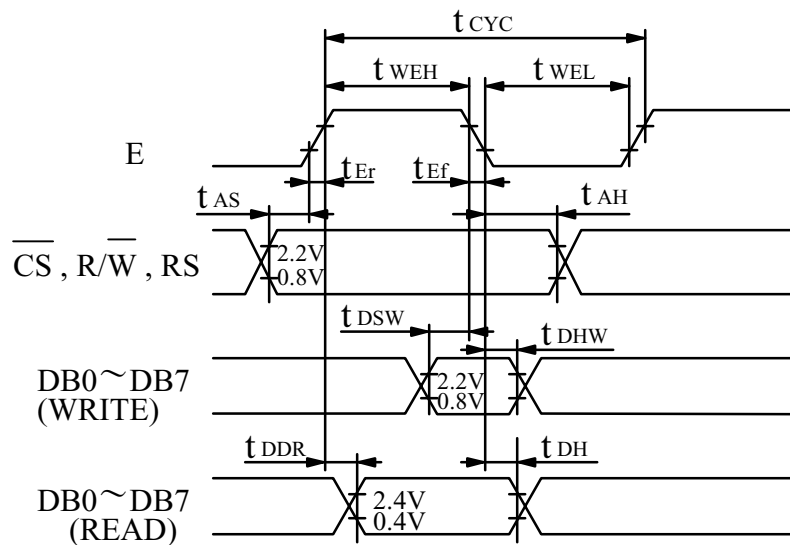



6. OPTICAL CHARACTERISTICS

I T E M		SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
VIEWING AREA	STN	$\varnothing 2 - \varnothing 1$	$K \geq 1.4$	40	—	—	deg.	1
	FSTN			50	—	—	deg.	1
CONTRAST RATIO	STN	K	$\varnothing = 10^\circ$ $\theta = 0^\circ$	—	5	—	—	1
	FSTN			5	—	—	—	1
RESPONSE TIME	tr ( rise )	$\varnothing = 10^\circ$ $\theta = 0^\circ$	Ta = -20°C	—	2886	—	ms	1
			Ta = 25°C	—	259	—		
			Ta = 70°C	—	156	—		
	tf ( fall )		Ta = -20°C	—	2193	—		
			Ta = 25°C	—	177	—		
			Ta = 70°C	—	84	—		
THE BRIGHTNESS OF BACK-LIGHT	L	IF = 900 mA	—	30	—	cd/m <sup>2</sup>	2	
			—	65	—		3	
PEAK EMISSION WAVELENGTH	$\lambda P$	IF = 900 mA	—	572	—	nm	1	


NOTE (1) : PLEASE REFER TO :  
CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS.  
EU - 002 A

NOTE (2) : POLARIZER MODE : TRANSFLECTIVE


NOTE (3) : POLARIZER MODE : TRANSMISSIVE



8. BLOCK DIAGRAM

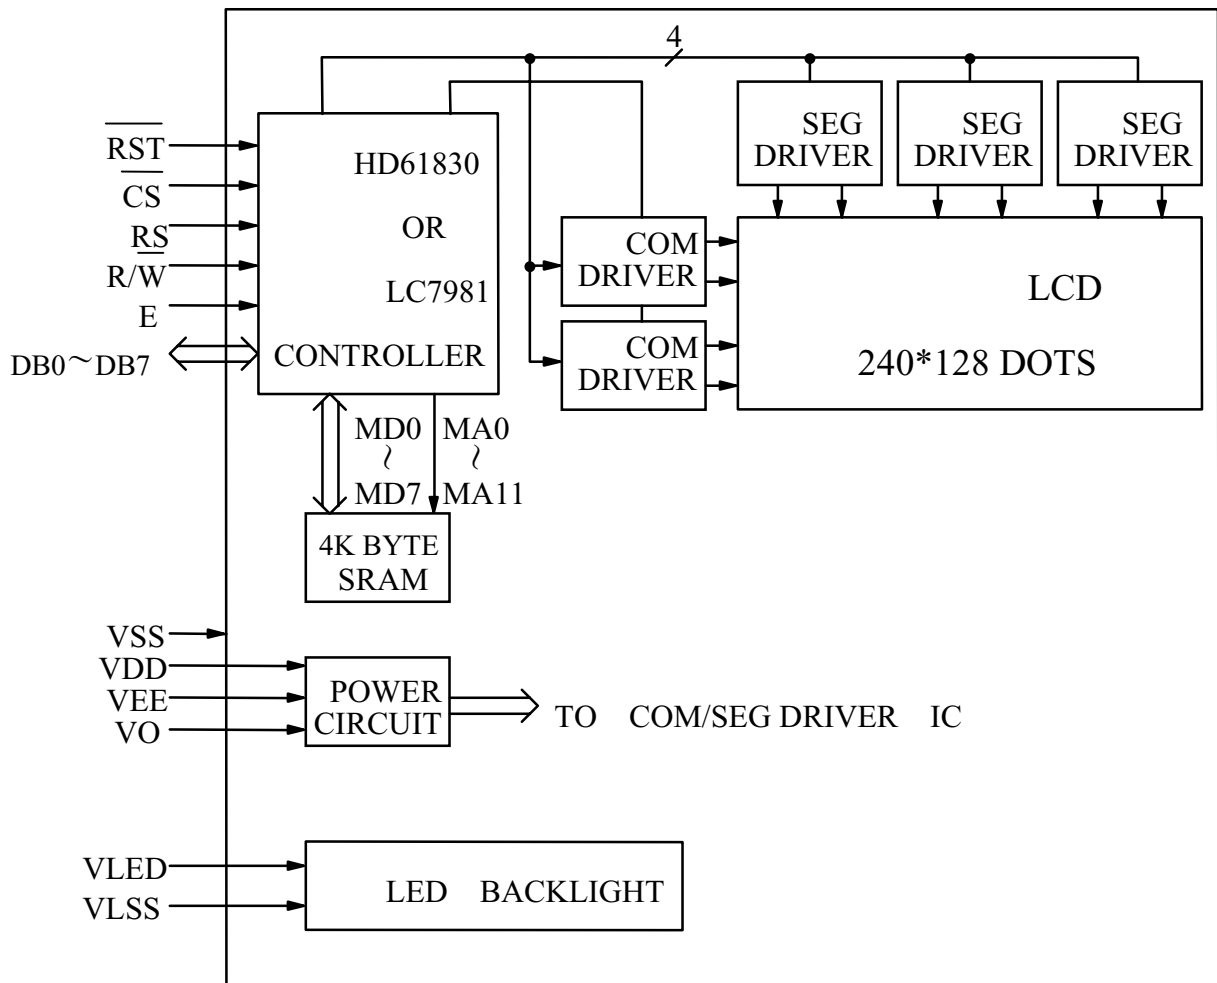

9. DETAIL DRAWING OF DOT MATRIX

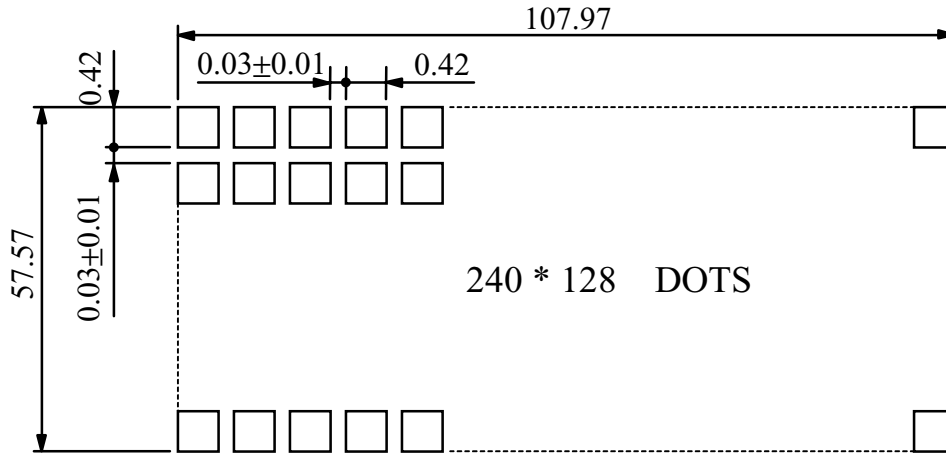


UNIT : mm  
SCALE : NTS  
NOT SPECIFIED TOLERANCE IS  $\pm 0.1$

10. INTERFACE SIGNALS

PIN NO	SYMBOL	LEVEL	FUNCTION
1	VSS	—	GROUND
2	VDD	—	POWER SUPPLY FOR LOGIC CIRCUIT
3	V0	—	OPERATING VOLTAGE FOR LCD DRIVE
4	RS	H/L	H : INSTRUCTION REGISTER L : DATA REGISTER
5	$\overline{R/W}$	H/L	H : DATA READ (LCD MODULE → MPU) L : DATA WRITE (LCD MODULE ← MPU)
6	E	H,H→L	ENABLE SIGNAL
7   14	DB0   DB7	H/L	DATA BUS LINE
15	$\overline{CS}$	H→L	CHIP SELECTION
16	$\overline{RST}$	L	RESET
17	VEE	—	POWER SUPPLY FOR LCD DRIVE
18   20	N.C	—	—————
A	VLED	—	POWER SUPPLY FOR LED BACKLIGHT (A)
K	VLSS	—	POWER SUPPLY FOR LED BACKLIGHT (K)
21	VLED	—	POWER SUPPLY FOR LED BACKLIGHT (A)
22	VLSS	—	POWER SUPPLY FOR LED BACKLIGHT (K)


1 1 . POWER SUPPLY

1 1 . 1 POWER SUPPLY FOR LCM

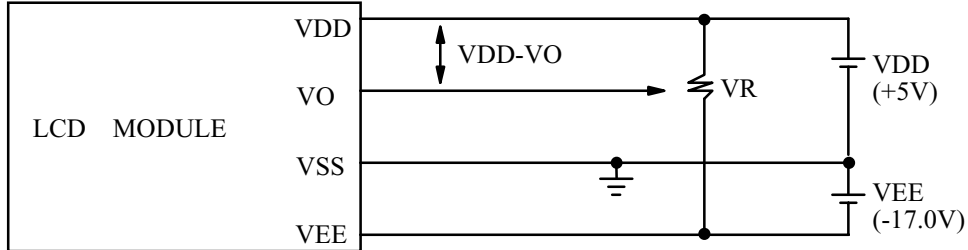

VDD-VO : LCD DRIVING VOLTAGE  
VR : 20KΩ

1 1 . 2 POWER SUPPLY FOR LED BACK - LIGHT

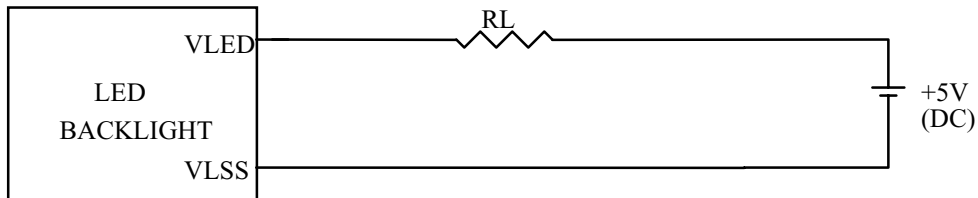

RECOMMENDED RESISTOR  $RL = 1\sim 3.3\Omega, 1WATT$ (CONTROLLER BY USER)  
\* THE BRIGHTNESS WOULD BE ALTERED SUBJECT TO DIFFERENT VALUES OF  $RL$

1 1 . 3 TIMING OF POWER SUPPLY AND INTERFACE SIGNAL

