

| | | |
|--------------------|--|----------------------|
| EXAMINED BY : | EMERGING DISPLAY TECHNOLOGIES CORPORATION | FILE NO . CAS-10088 |
| <i>Jason Ma.</i> | | ISSUE : JUN.19 ,2000 |
| APPROVED BY: | | TOTAL PAGE : 9 |
| <i>David Chang</i> | | VERSION : 3 |

| | | |
|----------|------------|----------------|
| CUSTOMER | ACCEPTANCE | SPECIFICATIONS |
|----------|------------|----------------|

MODEL NO . :

13B10(EL TYPES)

FOR MESSRS :

CUSTOMER'S APPROVAL

DATE :

BY :

EMERGING DISPLAY
TECHNOLOGIES CORPORATION

| | |
|-------------------------------|--------------|
| MODEL NO . 13B10(EL TYPES) | VERSION 3 |
|-------------------------------|--------------|

| | |
|---------------------|----------------------------------|
| RECORDS OF REVISION | DOC . FIRST ISSUE APR.10,1998 |
|---------------------|----------------------------------|

| DATE | REVISED PAGE NO. | SUMMARY |
|-------------|------------------|--|
| SEP.14,1998 | 8 | 10. INTERFACE SIGNALS REVISING THE FUNCTION OF PIN NO. 4 : H : INSTRUCTION REGISTER → H : DATA REGISTER L : DATA REGISTER →L : INSTRUCTION REGISTER |
| JUN.19,2000 | 1,2,3,5 | ALL NORMAL TEMPERATURE'S DATA WAS DELETED. |
| | | |

| Polarizer Mode | Backlight | Code value |
|----------------|-----------|------------|
| Transflective | EL | E |

E W 13 B 10 G E W

| LCD type + LCD color | Code Value |
|-------------------------|------------|
| STN + Yellow-Green | Y |
| STN + Gray | G |
| FSTN + White | F |

TABLE OF CONTENTS

| NO. | ITEM | PAGE |
|-----|--|------|
| 1. | GENERAL SPECIFICATIONS ----- | 1 |
| 2. | MECHANICAL SPECIFICATIONS ----- | 1 |
| 3. | ABSOLUTE MAXIMUM RATINGS ----- | 2 |
| 4. | ELECTRICAL CHARACTERISTICS ----- | 3 |
| 5. | INTERFACE TIMING CHARACTERISTICS ----- | 4 |
| 6. | OPTICAL CHARACTERISTICS ----- | 5 |
| 7. | OUTLINE DIMENSION ----- | 6 |
| 8. | BLOCK DIAGRAM ----- | 7 |
| 9. | DETAIL DRAWING OF DOT MATRIX ----- | 8 |
| 10. | INTERFACE SIGNALS ----- | 8 |
| 11. | POWER SUPPLY ----- | 9 |

1. GENERAL SPECIFICATIONS

1.1 GENERAL SPECIFICATIONS
PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :
EU - 002 A

1.2 APPLICATION NOTES FOR CONTROLLER
PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :
EU - 100

1.3 THIS INDIVIDUAL SPECIFICATION IS PRIOR TO GENERAL
SPECIFICATIONS .

2. MECHANICAL SPECIFICATIONS

- (1) NUMBER OF DOTS ----- 128W * 64H DOTS
- (2) MODULE SIZE ----- 77.8W * 69.8H * 9.5D(max) mm
- (3) EFFECTIVE AREA ----- 70.7W * 38.8H mm
- (4) ACTIVE AREA ----- 65.25W * 32.61H mm
- (5) DOT SIZE ----- 0.48W * 0.48H mm
- (6) DOT PITCH ----- 0.51W * 0.51H mm
- (7) LCD TYPE *
- (8) DRIVING METHOD ----- 1 / 64 DUTY MULTIPLEX DRIVE
- (9) VIEWING DIRECTION ----- 6 O'CLOCK

* PLEASE REFER TO NUMBERING SYSTEM .

3. ABSOLUTE MAXIMUM RATINGS

3.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS .

| PARAMETER | | SYMBOL | MIN . | MAX . | UNIT | REMARK |
|-------------------------------|-----------|---------|-------|-------|------|----------------------------|
| POWER SUPPLY FOR LOGIC | | VDD-VSS | 0 | 7.0 | V | |
| INPUT VOLTAGE | | VI | VSS | VDD | V | |
| STATIC ELECTRICITY | | — | — | 100 | V | NOTE (1) |
| POWER SUPPLY FOR EL BACKLIGHT | VOLTAGE | VEL | — | AC200 | Vrms | fEL=1.0KHZ 60 SEC . MAX |
| | FREQUENCY | fEL | — | 2.0 | KHZ | AC115Vrms 60 SEC . MAX |

NOTE (1) : TEST METHOD AND CONDITIONS :
AFTER CHARGING UP 200 PF CAPACITOR BY STATED VOLTAGE ,
THE CAPACITOR IS CONNECTED WITH INTERFACE PINS OF THE
MODULE .

3.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS .

| I T E M | OPERATING | | STORAGE | | COMMENT |
|---------------------|----------------|-----------------------------------|----------------|-----------------------------------|---|
| | MIN . | MAX . | MIN . | MAX . | |
| AMBIENT TEMPERATURE | - 20 °C | 60 °C | - 30 ° | 70 °C | NOTE (2) , (3) |
| HUMIDITY | — | 85 % RH | — | 85 % RH | WITHOUT CONDENSATION |
| VIBRATION | — | 2.45 m/s ² (0.25 G) | — | 11.76 m/s ² (1.2 G) | 10~100 HZ XYZ DIRECTIONS 1 Hr . EACH |
| SHOCK | — | 29.4 m/s ² (3 G) | — | 490.0 m/s ² (50 G) | 10 mSECONDS XYZ DIRECTIONS 1 TIME EACH |
| CORROSIVE GAS | NOT ACCEPTABLE | | NOT ACCEPTABLE | | |

NOTE (2) : Ta AT -30°C : 48HR MAX .
70°C : 168HR MAX .

NOTE (3) : BACKGROUND COLOR CHANGES SLIGHTLY DEPENDING ON AMBIENT
TEMPERATURE THIS PHENOMENON IS REVERSIBLE .

4 . ELECTRICAL CHARACTERISTICS

Ta = 25 °C

VDD = 5.0 V

| PARAMETER | SYMBOL | CONDITION | MIN . | TYP . | MAX . | UNIT |
|---|------------------------------|----------------------------------|---------|-------|---------|-------|
| POWER SUPPLY VOLTAGE FOR LOGIC | VDD - VSS | — | 4.75 | 5.0 | 5.25 | V |
| INPUT VOLTAGE NOTE (1) | VIH | H LEVEL | 0.7*VDD | — | VDD | V |
| | VIL | L LEVEL | GND | — | 0.3*VDD | V |
| OUTPUT VOLTAGE NOTE (1) | VOH | H LEVEL | VDD-0.4 | — | — | V |
| | VOL | L LEVEL | — | — | 0.4 | V |
| POWER SUPPLY CURRENT FOR LOGIC NOTE (2) | IDD | VDD-VSS = 5.0 V VDD-VO = 9.2V | — | 7.0 | — | mA |
| RECOMMENDED LCD DRIVING VOLTAGE NOTE (3) | VDD -V0 ∅ = 10° θ = 0° | Ta =- 20 °C | — | 9.2 | — | V |
| | | Ta = 25 °C | — | 9.2 | — | |
| | | Ta = 60 °C | — | 8.4 | — | |
| POWER SUPPLY FOR EL BACKLIGHT | VEL | fEL=400HZ | — | 100 | — | Vrms |
| | IEL | VEL=100V fEL=400HZ | — | 3.5 | — | mArms |

NOTE (1) : APPLIED TO TERMINALS CS1, CS2, R/W, D/I, DB0~DB7, E, RST.

NOTE (2) : THE DISPLAY PATTERN IS ALL "ON" . / "OFF" .

NOTE (3) : RECOMMENDED LCD DRIVING VOLTAGE MAY FLUCTUATE ABOUT ± 1.0V BY EACH MODULE .

5. INTERFACE TIMING CHARACTERISTICS

| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT | FIG. |
|------------------------|------------------|------|------|------|------|------|
| E cycle time | t _{CYC} | 1000 | — | — | nS | 1,2 |
| E high level | P _{WEH} | 450 | — | — | nS | 1,2 |
| E low level width | P _{WEL} | 450 | — | — | nS | 1,2 |
| E rise time | t _r | — | — | 25 | nS | 1,2 |
| E fall time | t _f | — | — | 25 | nS | 1,2 |
| Address setup time | t _{AS} | 140 | — | — | nS | 1,2 |
| Address hold time | t _{AH} | 10 | — | — | nS | 1,2 |
| Data setup time | t _{DSW} | 200 | — | — | nS | 1 |
| Data delay time | t _{DDR} | — | — | 320 | nS | 2 |
| Data hold time (Write) | t _{DHW} | 10 | — | — | nS | 1 |
| Data hold time (Read) | t _{DHR} | 20 | — | — | nS | 2 |

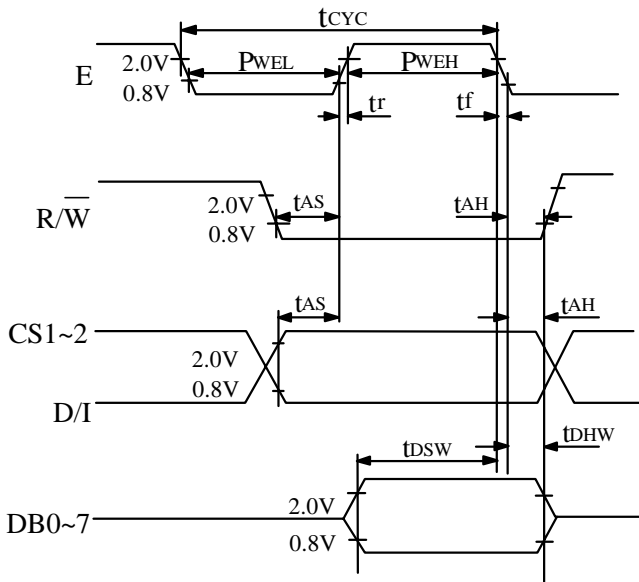


Fig . 1 CPU Write Timing

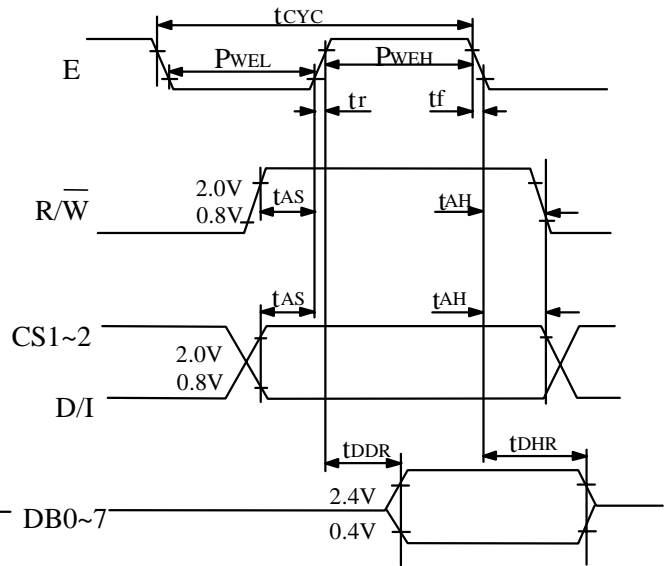


Fig . 1 CPU Read Timing

6. OPTICAL CHARACTERISTICS

Ta = 25 °C

VDD = 5.0 V

VDD - V0 = 9.2V

| I T E M | | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | NOTE |
|--------------------------------|-------------|-------------------|-------------------|------|------|-------------------|------|------|
| VIEWING AREA | STN | Ø 2 - Ø1 | K ≥ 1.4 | 30 | — | — | deg. | 1 |
| | FSTN | | | 40 | — | — | deg. | 1 |
| CONTRAST RATIO | STN | K | Ø = 10° θ = 0° | — | 5 | — | — | 1 |
| | FSTN | | | — | 8 | — | — | 1 |
| RESPONSE TIME | tr (rise) | Ø = 10° θ = 0° | Ta = -20°C | — | 650 | — | ms | 1 |
| | | | Ta = 25°C | — | 120 | 180 | | |
| | tf (fall) | | Ta = -20°C | — | 2300 | — | | |
| | | | Ta = 25°C | — | 240 | 360 | | |
| THE BRIGHTNESS OF BACKLIGHT | B | Ø = 10° θ = 0° | 10 | — | — | cd/m ² | 2 | |
| | | | 25 | — | — | | 3 | |

NOTE (1) : PLEASE REFER TO :


CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS.

EU - 002 A

NOTE (2) : POLARIZER MODE : TRANSFLECTIVE


NOTE (3) : POLARIZER MODE : TRANSMISSIVE

7. OUTLINE DIMENSION

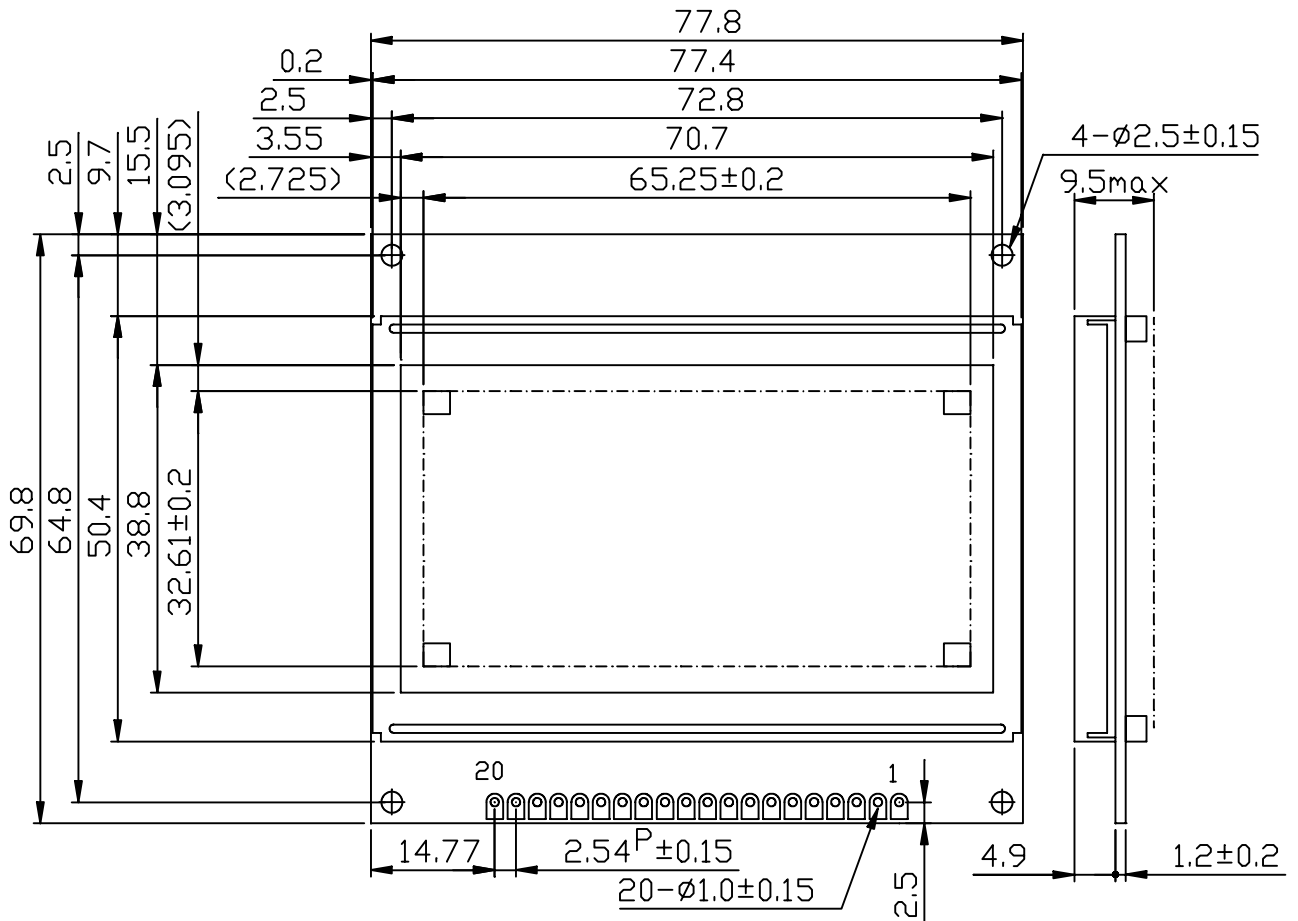


UNIT: mm
SCALE: NTS
NOT SPECIFIED TOLERANCE IS ±0.5mm

8. BLOCK DIAGRAM

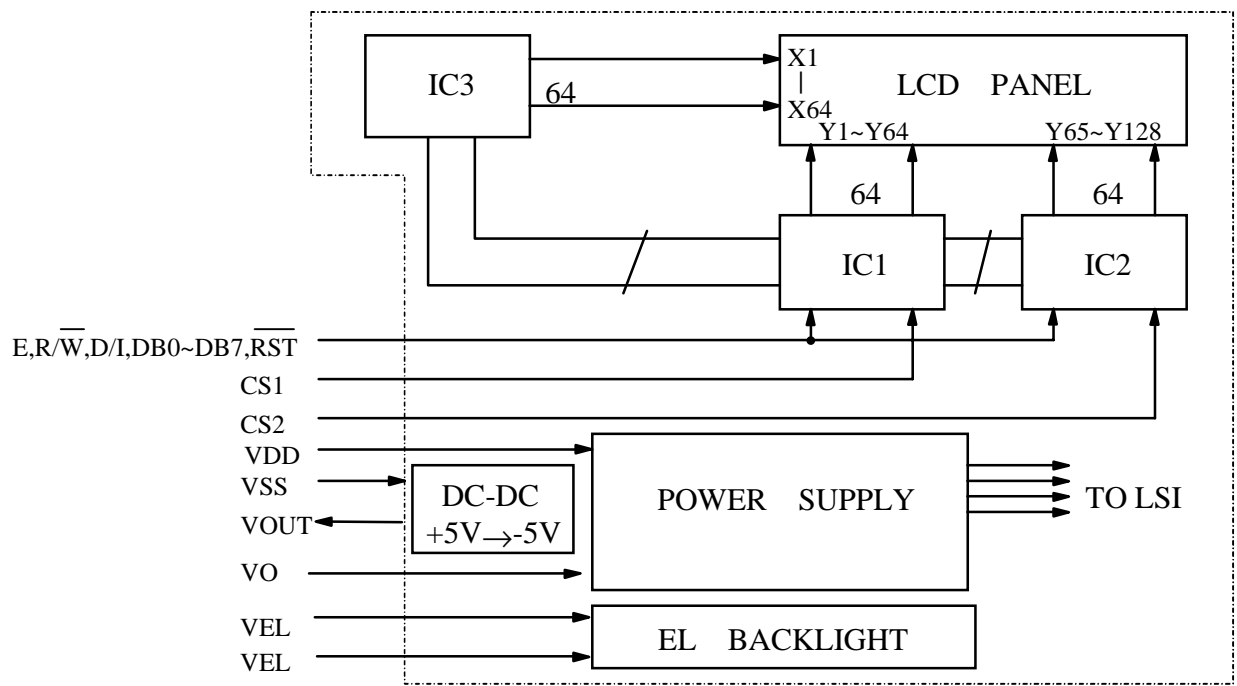

9. DETAIL DRAWING OF DOT MATRIX

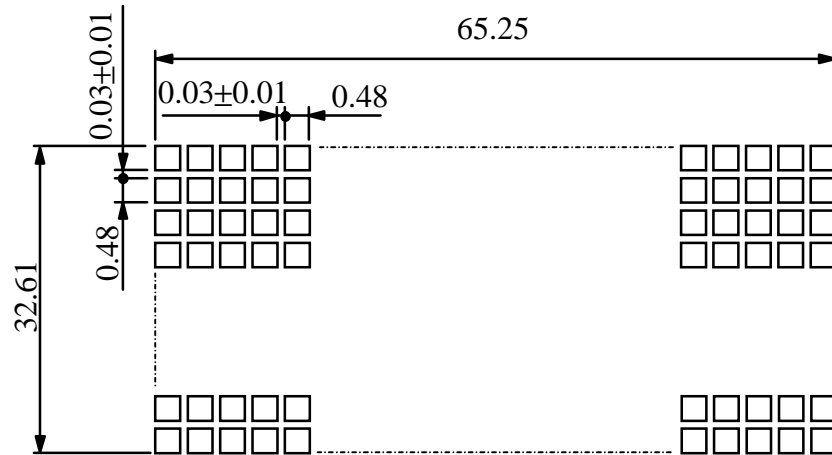


UNIT : mm
SCALE : NTS
NOT SPECIFIED TOLERANCE IS ± 0.1

10. INTERFACE SIGNALS

| PIN NO | SYMBOL | LEVEL | FUNCTION |
|--------------|--------------------|---------------------|---|
| 1 | VSS | — | GROUND |
| 2 | VDD | — | POWER SUPPLY FOR LOGIC CIRCUIT |
| 3 | VO | — | OPERATING VOLTAGE FOR LCD DRIVING |
| 4 | D / I | H / L | H : DATA INPUT L : INSTRUCTION CODE INPUT |
| 5 | R / \overline{W} | H / L | H : DATA READ (LCD MODULE \rightarrow MPU) L : DATA WRITE (LCD MODULE \leftarrow MPU) |
| 6 | E | H,H \rightarrow L | ENABLE SIGNAL |
| 7 14 | DB0 DB7 | H / L | DATA BUS LINE |
| 15 | CS1 | H | CHIP SELECTION FOR IC1 |
| 16 | CS2 | H | CHIP SELECTION FOR IC2 |
| 17 | \overline{RST} | L | RESET |
| 18 | VOUT | — | POWER SUPPLY FOR LCD DRIVING |
| 19 | NC | — | — |
| 20 | NC | — | — |
| 21 | VEL | — | POWER SUPPLY FOR EL BACKLIGHT |
| 22 | VEL | — | POWER SUPPLY FOR EL BACKLIGHT |


1 1 . POWER SUPPLY

1 1 . 1 POWER SUPPLY FOR LCM

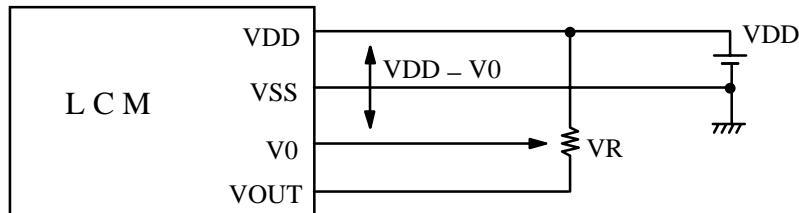

VDD-V0 : LCD DRIVING VOLTAGE
VR : 10K ~ 20KΩ

1 1 . 2 POWER SUPPLY FOR EL BACK - LIGHT

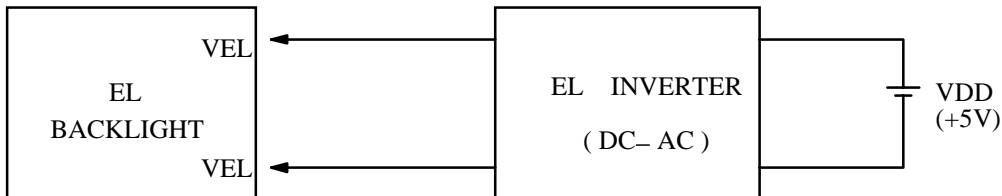

RECOMMENDED INVERTER : SOUN50350

1 1 . 3 TIMING OF POWER SUPPLY AND INTERFACE SIGNAL

