

EXAMINED BY :	EMERGING DISPLAY TECHNOLOGIES CORPORATION	FILE NO . CAS-50258
Jason Ma.		ISSUE : NOV.15,2000
APPROVED BY:		TOTAL PAGE : 10
David Chang		VERSION : 1

CUSTOMER ACCEPTANCE SPECIFICATIONS

MODEL NO. :

EW 3 2 F 9 2 F E W

FOR MESSRS :

CUSTOMER'S APPROVAL

DATE :

BY :

EMERGING DISPLAY
TECHNOLOGIES CORPORATION

MODEL NO. E W 3 2 F 9 2 F E W	VERSION 1
----------------------------------	--------------

RECORDS OF REVISION	DOC . FIRST ISSUE NOV.15,2000
---------------------	----------------------------------

DATE	REVISED PAGE NO.	SUMMARY

TABLE OF CONTENTS

NO.	ITEM	PAGE
1.	GENERAL SPECIFICATIONS -----	1
2.	MECHANICAL SPECIFICATIONS -----	1
3.	ABSOLUTE MAXIMUM RATINGS -----	2
4.	ELECTRICAL CHARACTERISTICS -----	3
5.	TIME CHARACTERISTICS -----	4,5
6.	OPTICAL CHARACTERISTICS -----	6
7.	OUTLINE DIMENSION -----	7
8.	BLOCK DIAGRAM -----	8
9.	DETAIL DRAWING OF DOT MATRIX -----	9
10.	INTERFACE SIGNAL -----	9
11.	POWER SUPPLY -----	10

1. GENERAL SPECIFICATIONS

1.1 GENERAL SPECIFICATIONS

PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :

E U - 0 0 2 A

1.2 THIS INDIVIDUAL SPECIFICATIONS IS PRIOR TO GENERAL SPECIFICATIONS .

1.3 TOUCH PANEL SPECIFICATIONS PLEASE REFER TO :

E U - 3 0 0

2. MECHANICAL SPECIFICATIONS

(1) NUMBER OF DOTS	-----	320W * 240H DOTS
(2) MODULE SIZE	-----	109.3W * 97.9H * 6.8D (max.) mm
(3) EFFECTIVE AREA	-----	77.79W * 58.59H mm
(4) ACTIVE AREA	-----	76.79W * 57.59H mm
(5) DOT SIZE	-----	0.23W * 0.23H mm
(8) DOT PITCH	-----	0.24W * 0.24H mm
(9) LCD TYPE	-----	FSTN,POSITIVE,BLACK/WHITE, TRANSFLECTIVE
(10) DRIVING METHOD	-----	1 / 240 DUTY MULTIPLEX DRIVE
(11) VIEWING DIRECTION	-----	6 O'CLOCK
(12) BACK LIGHT	-----	EL;COLOR : WHITE

3. ABSOLUTE MAXIMUM RATINGS

3.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS . (AT Ta = 25 °C)

PARAMETER	SYMBOL	MIN .	MAX .	UNIT	REMARK
POWER SUPPLY FOR LOGIC	VDD – VSS	0	7.0	V	
POWER SUPPLY FOR EL BACKLIGHT	ELON – VSS	—	6	V	
POWER SUPPLY FOR LCD DRIVING	VEE – VSS	0	3.0	V	
INPUT VOLTAGE	VI	VSS	VDD	V	
STATIC ELECTRICITY	—	—	100	V	NOTE (1)

NOTE (1) : TEST METHOD AND CONDITIONS :
AFTER CHARGING UP 200 PF CAPACITOR BY STATED VOLTAGE ,
THE CAPACITOR IS CONNECTED WITH INTERFACE PINS OF THE
MODULE .

3.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS .

I T E M	OPERATING		STORAGE		REMARK
	MIN .	MAX .	MIN .	MAX .	
AMBIENT TEMPERATURE	- 10 °C	50 °C	- 20 °C	60 °C	NOTE (2), (3)
HUMIDITY	—	85 % RH	—	85 % RH	WITHOUT CONDENSATION
VIBRATION	—	2.45 m/S ² (0.25 G)	—	11.76 m/S ² (1.2 G)	10~100HZ XYZ DIRECTIONS 1 Hr.EACH
SHOCK	—	29.4 m/S ² (3 G)	—	490 m/S ² (50 G)	10 mSECONDS XYZ DIRECTIONS 1 TIME EACH
CORROSIVE GAS	NOT ACCEPTABLE		NOT ACCEPTABLE		

NOTE (2) : Ta AT -20°C : 48HR MAX .
60°C : 168HR MAX .

NOTE (3) : BACKGROUND COLOR CHANGES SLIGHTLY DEPENDING ON AMBIENT
TEMPERATURE THIS PHENOMENON IS REVERSIBLE .

4. ELECTRICAL CHARACTERISTICS

Ta = 25 °C

PARAMETER	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT
POWER SUPPLY VOLTAGE FOR LOGIC	VDD - VSS	—	2.5	—	5.5	V
INPUT VOLTAGE NOTE (1)	VIH	H LEVEL	0.8VDD	—	—	V
	VIL	L LEVEL	—	—	0.2VDD	V
POWER SUPPLY CURRENT FOR LOGIC NOTE (2)	IDD	VDD - VSS =5.0V VEE - VSS=21.5V	—	30	—	mA
POWER SUPPLY CURRENT FOR LOGIC NOTE (3)	IDD	VDD - VSS =5.0V VEE - VSS =21.5V	—	300	—	μA
POWER SUPPLY CURRENT FOR LCD DRIVE NOTE (2)	IEE	VDD - VSS =5.0V VEE - VSS=21.5V	—	2.5	—	mA
CONTRAST ADJUST VOLTAGE	VEE - VSS ∅=10°, θ=0° DUTY=1/240	Ta = -10 °C	—	(24.5)	—	V
		Ta = 25 °C	—	(21.5)	—	V
		Ta = 50 °C	—	(19.5)	—	V
CLOCK OSCILLATION FREQUENCY	fFLM	—	70	75	80	HZ
POWER SUPPLY FOR EL BACKLIGHT	ELON	—	—	5.0	—	V


NOTE (1) : APPLIED TO TERMINALS FLM , CL1, CL2, M, D0, D1, D2, D3.

NOTE (2) : THIS DISPLAY PATTERN IS ALL ON OR OFF , EL BACKLIGHT ON .

NOTE (3) : THIS DISPLAY PATTERN IS ALL ON OR OFF , EL BACKLIGHT OFF.


NOTE (4) : RECOMMENDED LCD DRIVING VOLTAGE MAY FLUCTUATE ABOUT ± 1 . 0 V BY EACH MODULE.

5. TIMING CHARACTERISTICS
5.1 INTERFACE TIMING

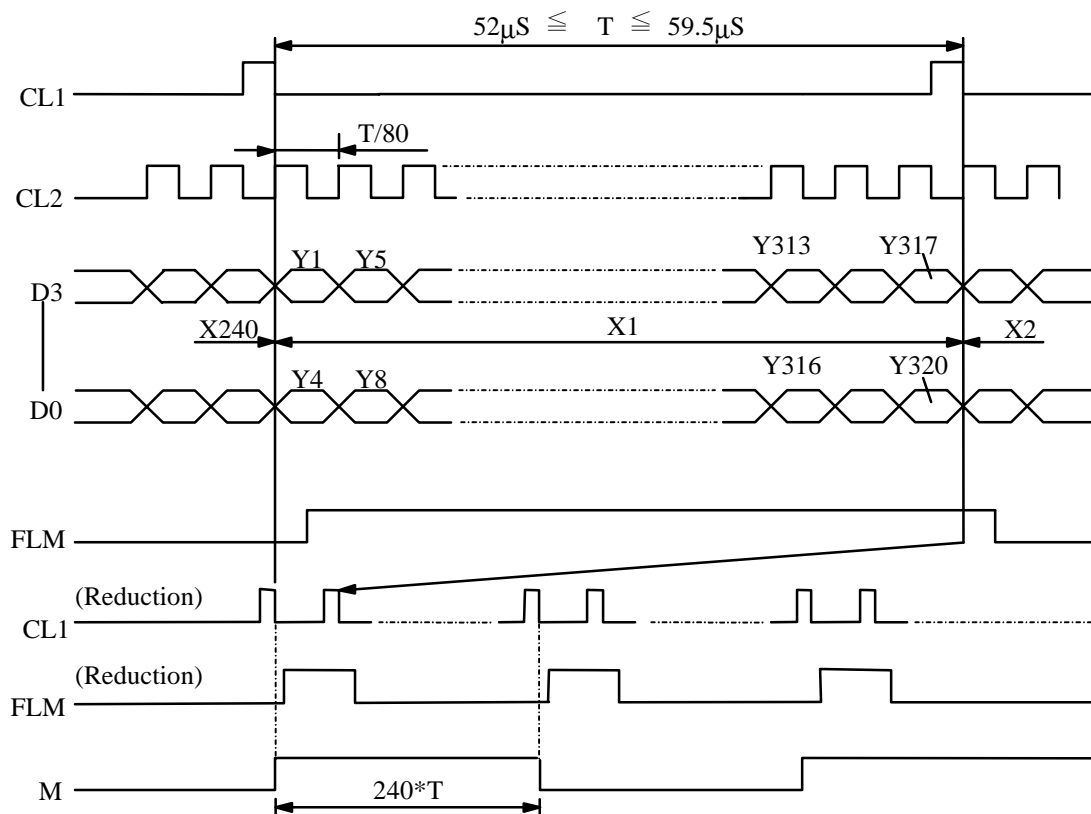

5.2 SWITCHING CHARACTERISTICS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
CL1 PULSE WIDTH	tw1	30	—	—	ns
CL2 PULSE	tw	51	—	—	ns
RISE,FALL TIME	tr,tf	—	—	50	ns
DATA SETUP TIME	tDSU	30	—	—	ns
DATA HOLD TIME	tDHD	40	—	—	ns
CL1 SETUP TIME	tLSU	51	—	—	ns
CL1 TO CL2 TIME	tLC	51	—	—	ns
FLM SETUP TIME	tsetup	30	—	—	ns
FLM HOLD TIME	thold	50	—	—	ns
OUTPUT DELAY TIME	tDF	—	—	200	ns

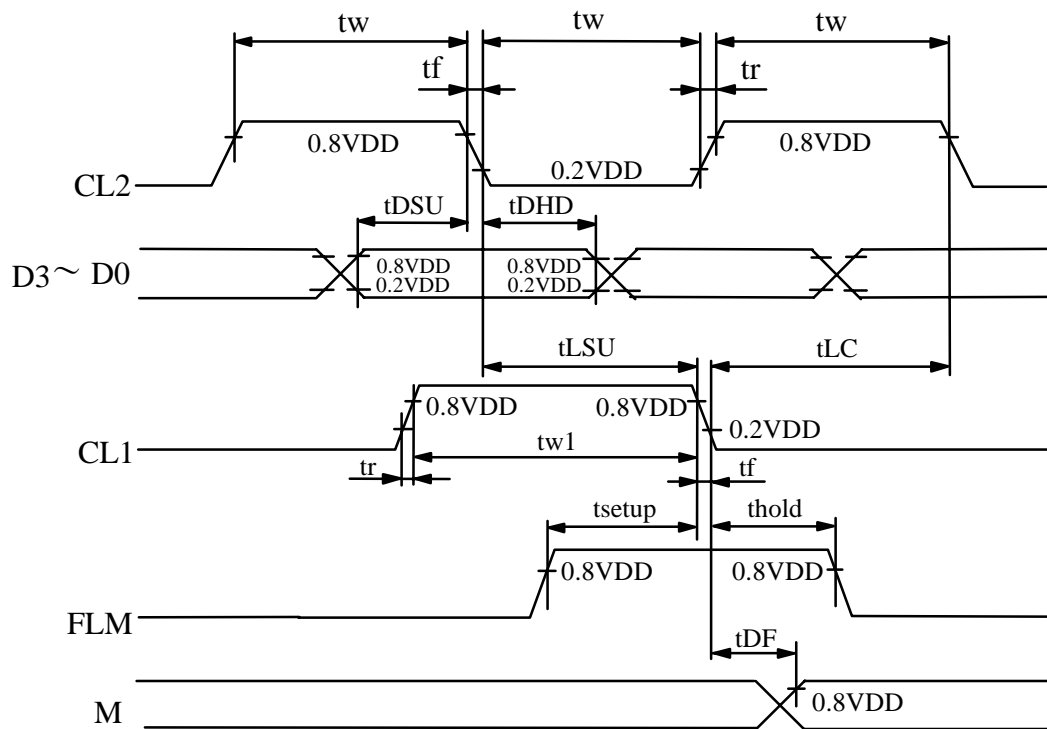


6. OPTICAL CHARACTERISTICS

Ta = 25 °C

I T E M	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
VIEWING AREA	$\varnothing 2 - \varnothing 1$	$K \geq 2.0$	50	—	—	deg.	1
CONTRAST	K	$\varnothing = 10^\circ$	—	3	—	—	1
RESPONSE TIME	t r (rise)	$\varnothing = 10^\circ$ $\theta = 0^\circ$	—	(330)	—	msec	1
	t f (fall)	$\varnothing = 10^\circ$ $\theta = 0^\circ$	—	(330)	—	msec	1
THE BRIGHTNESS OF BACK-LIGHT	B	$\varnothing = 10^\circ$ $\theta = 0^\circ$	—	(5)	—	cd/m ²	1


NOTE (1) : PLEASE REFER TO :
CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS. (EU - 002A)

7. OUTLINE DIMENSION

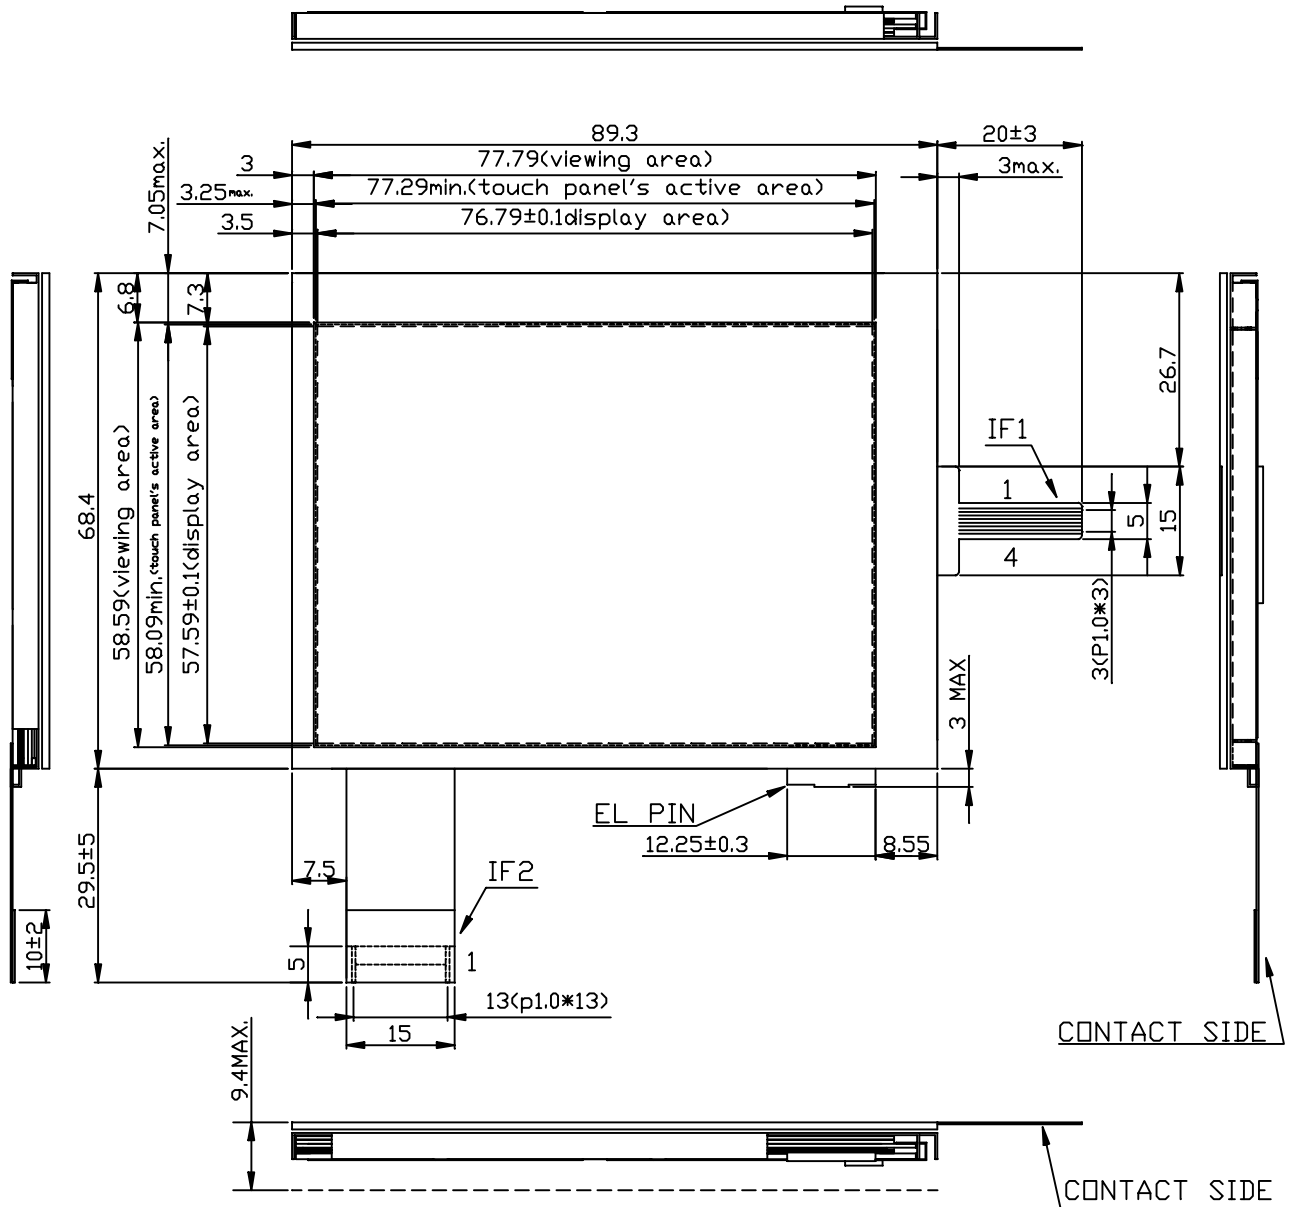


UNIT : mm
SCALE : NTS
NOT SPECIFIED TOLERANCE IS ± 0.5

8. BLOCK DIAGRAM

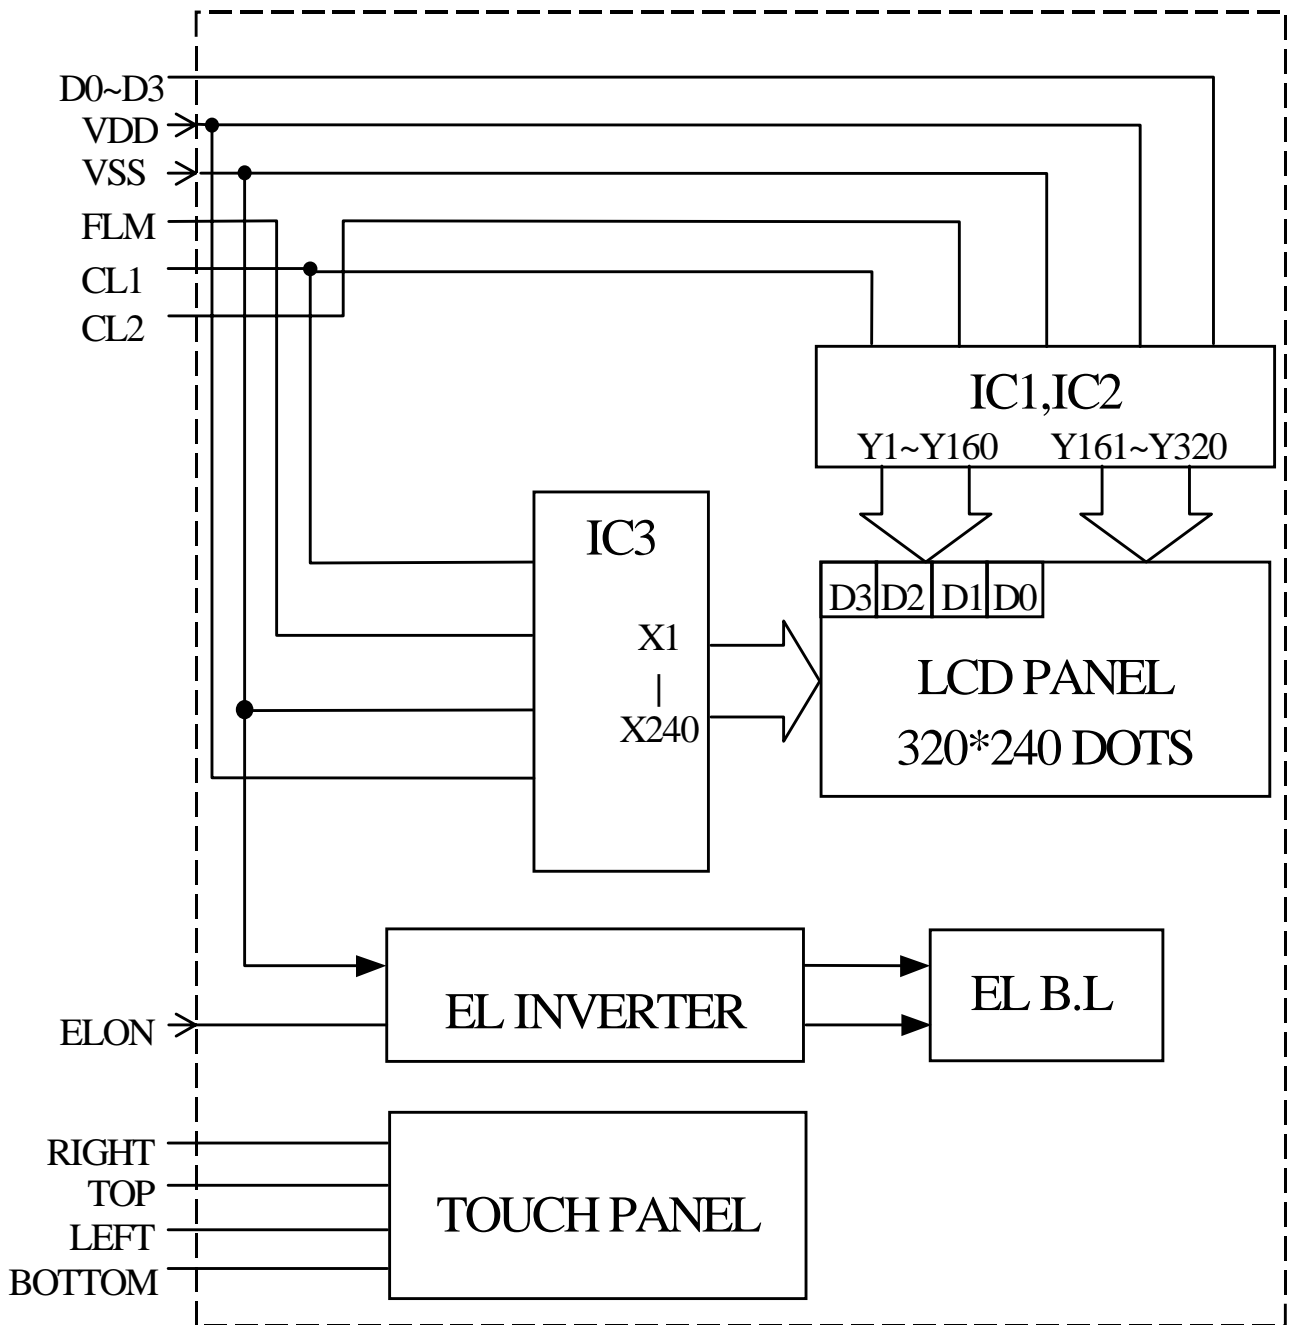

9. DETAIL DRAWING OF DOT MATRIX

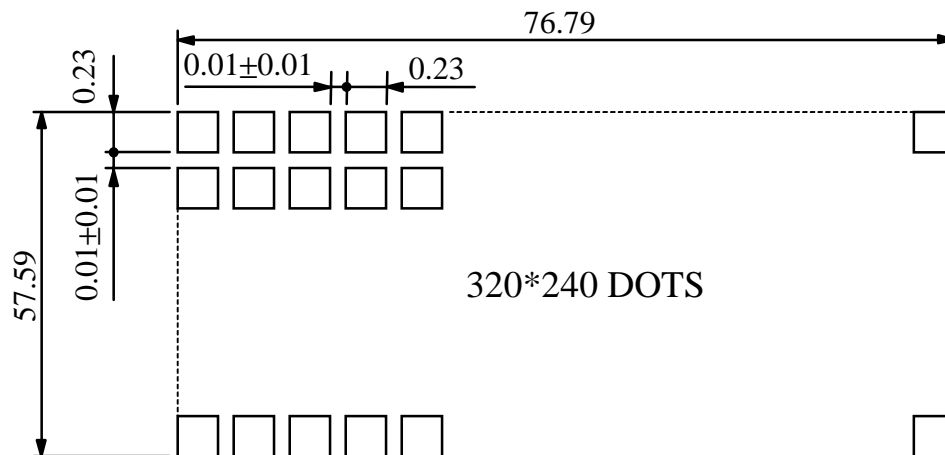

UNIT : mm
SCALE : NTS
NOT SPECIFIED TOLERANCE IS ± 0.1

10. INTERFACE SIGNALS

IF1 :

PIN NO.	SYMBOL	FUNCTION
1	VDD	POWER SUPPLY FOR LOGIC CIRCUIT.
2	VSS	GROUND.
3	VEE	POWER SUPPLY FOR LCD
4	FLM	THE FLM SIGNAL INDICATING THE BEGINNING OF EACH DISPLAY CYCLE .
5	N.C.	NO CONNECTION
6	CL1	DISPLAY DATA LATCH.
7	CL2	DISPLAY DATA SHIFT.
8	D0	DISPLAY DATA
9	D1	DISPLAY DATA
10	D2	DISPLAY DATA
11	D3	DISPLAY DATA
12	$\overline{\text{DOFF}}$	LOW : DISPLAY OFF , HIGH : DISPLAY ON DRIVING VOLTAGE
13	ELON	HIGH : EL BACKLIGHT ON LOW : EL BACKLIGHT OFF
14	N.C.	NO CONNECTION

IF2 : TOUCH PANEL INTERFACE

PIN NO.	SYMBOL	FUNCTION
1	RIGHT	RIGHT SIDE
2	TOP	TOP
3	LEFT	LEFT SIDE
4	BOTTOM	BOTTOM

1 1 . POWER SUPPLY

1 1.1 POWER SUPPLY FOR LCM

